




INSTALL IT. SAFEGUARD YOUR
EQUIPMENT.

Arma-Chek Juna

Durable protection on the high seas

- // IMO-certified insulation system for shipbuilding
- // Pre-covered flexible insulation system with black aluminium facing
- // Can be used on combustible and non-combustible pipes
- // Thin wall thicknesses due to very high surface emissivity factor

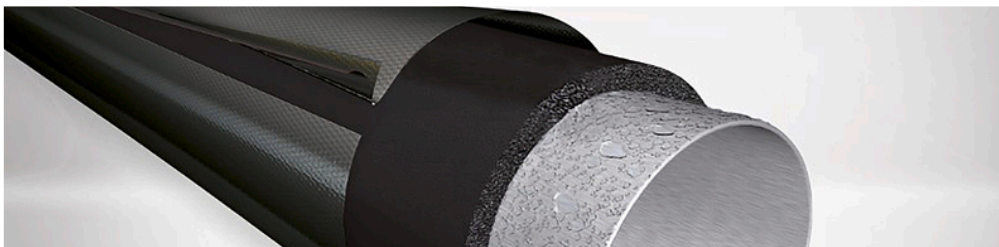

 **armacell**[®]
ArmaClad[™]

INSTALL IT. SAFEGUARD YOUR EQUIPMENT.

Arma-Chek Juna

THE COST-EFFICIENT ONE-STEP SOLUTION

Technical installations which are subject to mechanical stress should be covered to protect them against damage. Armacell's flexible covering systems not only provide tough protection against weathering, mechanical impact and corrosion under insulation (CUI), but also save time and money. Unlike traditional insulation materials and coverings, the precovered products can be installed in a single step. Arma-Chek Juna is UV-resistant and can be installed on combustible and non-combustible pipes.

// Optimal strength-to-weight ratio

The flexible incombustible covering is made of fibreglass fabric laminated with black aluminium. Thanks to its low bulk density and outstanding tear strength, Arma-Chek Juna is predestined for covering elastomeric and other insulation materials used in marine applications. In combination with ArmaFlex insulation it offers a perfect strength-to-weight ratio. Ships equipped with Armacell's lightweight solutions are less expensive to operate due to lower fuel demands.



// Highly flexible and space saving

Due to its high flexibility Arma-Chek Juna ensures easy installation even in tight spaces on board vessels. What's more, compared to aluminium-clad insulation the lightweight product allows space-saving installation. As the black surface of the covering is highly absorptive, thinner insulation thicknesses can be specified. The emissivity factor indicates the relative ability of a material to emit energy by radiation. The higher this factor, the smaller the insulation thickness needed. When a bright shiny surface is used, the wall thickness of the insulation has to be increased significantly.

// Ideal solution for python beverage tubing

Pythons are now state of the art for supplying beverages at low temperatures. They consist of a bundle of plastic tubes and cooling lines encased in insulation. The ArmaFlex insulation ensures that the desired medium temperature is maintained and prevents energy losses and condensation. The Arma-Chek Juna covering protects the surface of the python against mechanical impact, thus ensuring a long service life for the equipment.

TECHNICAL DATA - ARMA-CHEK JUNA

Brief description	Arma-Chek Juna innovative covering is, thanks to its low bulk density and outstanding tear strength, predestined for covering elastomeric insulations or other material types used in the ship industry. Arma-Chek Juna in combination with ArmaFlex insulation can be used on combustible and non-combustible substrates.
Material type	Highly flexible closed-cell elastomeric foam material based on synthetic rubber. Covering: made of fiberglass fabrics laminated with black coloured aluminium facing.
Product colour range	Black foam with black covering
Product range	Arma-Chek Juna is available in a range of pre-covered tubes & sheets, as well as single covering.
Applications	Insulation and mechanical protection on cold service pipework/fittings for refrigeration systems everywhere onboard, and for pipework, fittings, air ducts and tanks insulation in cargo areas, mail rooms, baggage rooms and refrigerated compartments of service spaces, and exterior locations.
Installation	The ArmaFlex and ArmaClad Arma-Chek installation manuals should be consulted before assembly. We offer special installation courses for the application of ArmaClad Arma-Chek. Certified and compatible adhesive for a long-term performing system is ArmaFlex 520.
Remarks	Rough handling of the material can cause puckering on the surface. Creases and micro-cracks of the surface don't affect the functional properties of the covering.

Property	Value / Assessment	Standard / Test method
Temperature range		
Service temperature	Min. °C	Max. °C ¹
	-50	110
	Remarks	+550 °C for the jacketing.
Thermal conductivity		
Remarks	Depends on ArmaFlex substrate.	EN ISO 13787, EN 12667, EN ISO 8497
Fire Performance and Approvals		
Surface flammability ²	Pre-covered products: low-flammable - 2010 FTP-Code (MED 96/98/EC, Module D) Covering : low-flammable - 2010 FTP-Code (MED 96/98/EC, Module D)	IMO 2010 FTP Code, Part 5
Fire performance		
Practical fire behaviour	Self-extinguishing, does not drip, does not spread flames	
Resistance to water vapour		
Water vapour diffusion resistance factor	depends on used Armaflex material	EN 12667, EN 13469
Physical attributes		
Thickness	approx. 240 µm (0,24 mm)	EN 2286
Mechanical properties		
Resistance to mechanical impact	Good puncture and tear resistance.	
Weather and UV resistance		
UV resistance ³	excellent	
Other technical features		
Shelf life	Tape, self-adhesive: 1 year	
Storage	Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).	

¹+85 °C, for products with a self-adhesive layer.

²According to IMO 2010 FTP Code annex 2, clause 2.2 a fire technical test for smoke density and toxicity is not necessary.

³In outdoor applications the colour may fade. This does not have any impact on the functionality of the covering or the insulation material.

Tube – precovered and self-seal. Black / Anthracite

AF-3				AF-5				AF-6			
Pipe Ø [mm]	Item	Insulation thickness [mm]	Content [metric]	Pipe Ø [mm]	Item	Insulation thickness [mm]	Content [metric]	Pipe Ø [mm]	Item	Insulation thickness [mm]	Content [metric]
15	AFJ-3-015	14.0	54 m	18	AFJ-5-018	25.0	30 m	15	AFJ-6-015	32.0	22 m
18	AFJ-3-018	14.0	48 m	22	AFJ-5-022	25.0	26 m	18	AFJ-6-018	32.0	22 m
22	AFJ-3-022	14.5	42 m	28	AFJ-5-028	25.0	26 m	22	AFJ-6-022	33.5	20 m
28	AFJ-3-028	15.5	30 m	35	AFJ-5-035	27.0	16 m	28	AFJ-6-028	35.0	16 m
35	AFJ-3-035	16.0	20 m	42	AFJ-5-042	27.0	14 m	35	AFJ-6-035	35.0	14 m
42	AFJ-3-042	16.5	20 m	54	AFJ-5-054	28.5	10 m	42	AFJ-6-042	36.5	10 m
54	AFJ-3-054	17.0	12 m	60	AFJ-5-060	29.0	8 m	48	AFJ-6-048	37.5	8 m
60	AFJ-3-060	17.0	12 m	76	AFJ-5-076	30.0	6 m	54	AFJ-6-054	38.0	8 m
76	AFJ-3-076	17.5	8 m	89	AFJ-5-089	30.5	6 m	60	AFJ-6-060	39.0	6 m
89	AFJ-3-089	18.0	8 m	114	AFJ-5-114	31.5	5 m	76	AFJ-6-076	40.5	5 m
114	AFJ-3-114	18.5	6 m	140	AFJ-5-140	32.0	3 m	89	AFJ-6-089	41.5	4 m
-	-	-	-	-	-	-	-	114	AFJ-6-114	43.0	4 m
-	-	-	-	-	-	-	-	140	AFJ-6-140	44.5	2 m
-	-	-	-	-	-	-	-	168	AFJ-6-168	45.0	2 m

Sheet – standard. FEF: black / anthracite Covering: black. 2m length

Item	Insulation thickness [mm]	Content [metric]
AFJ-13MM	13	9 m ²
AFJ-19MM	19	7 m ²
AFJ-25MM	25	5 m ²
AFJ-32MM	32	4 m

Covering. Black

Item	Width [mm]	Length [m]	Content [metric]	Content [quantity]
AJ-COAT	980	50	49 m ²	1 roll

Tape – self-adhesive. Black. For beverage pipes

Item	Thickness [mm]	Width [mm]	Length [m]	Content [quantity]
AJ-TAPE75-P	0.30	75.0	50	8 piece

Tape – self-adhesive. Black

Item	Thickness [mm]	Width [mm]	Length [m]	Content [quantity]
AJ-TAPE50	0.05	50.0	50	6 piece

Accessories

Item	Description	Content [quantity]
ADH520/1,0E	1.0 litre tins of ArmaFlex 520 adhesive packed in a carton.	12 tin
ADH520/0,5E	0.5 litre tins of ArmaFlex 520 adhesive packed in a carton.	12 tin
ACH-MASTICD	Black mastic. Sealing compound for installing Arma-Chek outdoors. 290 ml per piece.	12 piece

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

Trademarks followed by © or ™ are trademarks of the Armacell Group. © Armacell, 2023 All rights reserved.

ArmaClad | Arma-Chek Juna | Brochure | 032024 | en-GB

ABOUT ARMACELL

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.



For more information, please visit:
www.armacell.com