



INSTALL IT. ENJOY QUIETNESS.

ArmaSound RD240

Optimal performance at lower thickness

- // Excellent sound absorption behaviour
- // Highly hydrophobic, open-cell structure designed to resist water ingress
- // Air-flow resistivity and complex pore geometry for maximum acoustic benefit
- // Easy application and low maintenance
- // Designed for use in demanding environments



 **armacell**[®]
ArmaSound[®]


TECHNICAL DATA - ARMASOUND RD240

Brief description	Highly flexible, hydrophobic, open-cell acoustic insulation material with complex pore geometry.
Material type	Elastomeric foam based NBR/PVC synthetic rubber.
Product colour range	Black
Special features	Excellent sound absorption performance.
Product range	Sheets, 10, 15, 20, and 25mm thickness / width 500 and 1000 mm / length 1000 and 2000 mm.
Applications	In general applications ArmaSound RD240 is used as acoustic insulation material with excellent sound absorption performance in a variety of different applications, e.g. fan-coil units, duct linings, cabinet linings, chiller systems, enclosures, pipelines. In industrial applications ArmaSound RD240 is used as an important component of ArmaSound Industrial Systems to provide acoustic insulation on industrial pipework and vessels ensuring reduction of sound transmission. Further industrial application area is sound absorption performance of enclosures.
Installation	Please refer to the ArmaSound Industrial Systems application manual before installation. Please contact Technical Services.
Remarks	Certificate of Fire Approval by Lloyd's Register (Class 1, BS 476 part 7).

Property	Value / Assessment				Standard / Test method	
Temperature range						
Service temperature	Min. °C	Min. °F	Max. °C	Max. °F	EN 14706, EN 14707, EN 14304	
	-20	-4	85	185		
Thermal conductivity						
Declared thermal conductivity	θm		0 °C (32 °F)		EN 12667	
	λd ≤ [W/(m·K)]		0.062			
	k ≤ [Btu-in/(h·ft ² ·°F)]		0.430			
Fire Performance and Approvals						
Surface spread of flame	Class 1				BS 476 Part 7	
Surface burning characteristics	< 25 flame spread index				ASTM E84	
Fire performance						
Practical fire behaviour	Self-extinguishing, does not drip, does not spread flames.					
Resistance to water						
Water absorption ¹	≤ 10% by volume after 24 hours				AGI Q 136	
Physical attributes						
Density	220 to 360 kg/m ³ 13.7 to 25.5 lb/ft ³				ISO 845, ASTM D1622	
Mechanical properties						
Tensile strength	[MD] 70 to 190 kPa 10.2 to 27.6 psi				ISO 1798 ²	
Elongation	50 to 90 %				ISO 1798 ²	
Tear strength	0.4 to 1.4 kN/m 2.3 to 8.0 lbf/in				ISO 34-1 ³	
Acoustic performance						
Weighted sound absorption coefficient, α _w ¹	6 mm: 0.15 (H) Class E 10 mm: 0.25 (H) Class E 15 mm: 0.40 (MH) Class D 25 mm: 0.55 (MH) Class C				ISO 354, EN ISO 11654	
Noise reduction coefficient ¹	Thickness (mm)	6	10	15	25	ASTM C423
	NRC	0.15	0.40	0.60	0.70	

Property	Value / Assessment					Standard / Test method
Octave band sound absorption coefficient, α^1	Thickness	6mm	10mm	15mm	25mm	ISO 354, EN ISO 11654
	125 Hz	0.01	0.01	0.03	0.09	
	250 Hz	0.03	0.04	0.11	0.28	
	500 Hz	0.07	0.15	0.38	0.77	
	1000 Hz	0.18	0.46	0.80	1.03	
	2000 Hz	0.39	0.87	1.03	0.94	
	4000 Hz	0.74	0.94	0.89	0.90	

Absorption coefficient graph

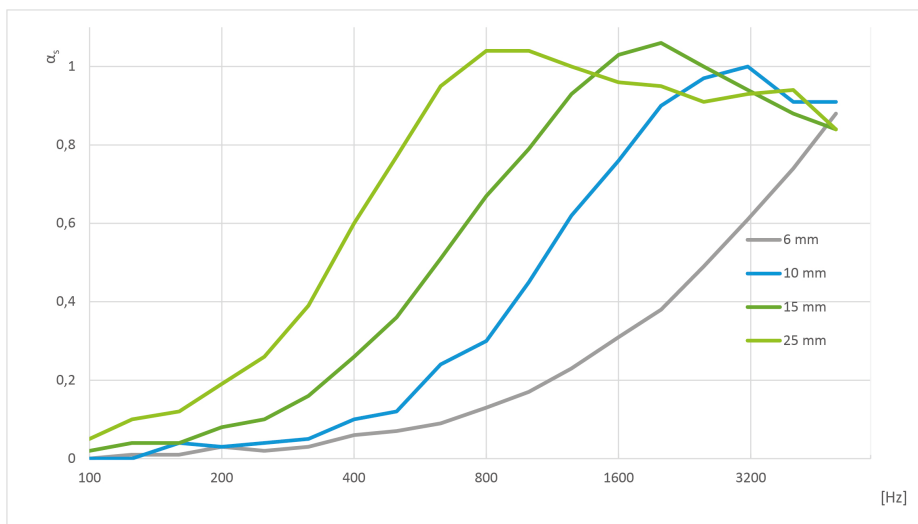

Weather and UV resistance

Weather resistance In all industrial applications, except for enclosures and other similar sound absorption applications, the outer layer of the material must be protected with an adequate covering like Arma-Chek R, metal jacketing or preformed UV-cured GRP (Glass-Reinforced Plastic) cladding. For further information please contact Technical Services.

Health and environment

Health aspects Fibre dust free

Other technical features

Additional remarks For environmental conditions outside the given range please contact Technical Services.

Adhesion and sealing ArmaFlex Adhesive 520 or Adhesive HT625 shall be used for reliable adhesion of joints and seams. In some configurations 19 mm wide stainless steel bands with wing clips (or blind rivets) shall be used for fixing and final securing.

Application conditions⁴ Application temperature: +5 °C to +35 °C (+41 °F to +95 °F)
Maximum relative humidity: 80%

Shelf life⁵ Max. 3 years

Storage Material shall be stored indoors, in clean and dry conditions, away from direct sunlight.

¹Based on single test results. Can be used for information / reference only.

²Type 1 sample.

³Minimum value in Machine Direction (MD) and in Cross Direction (CD). Method B, procedure (b), angle test piece with a nick.

⁴Application temperature (temperature of installation) refers to the ambient temperature during application and the surface temperature of the substrate to which the product is installed.

⁵Shelf life (maximum storage time) is limited to ensure that only currently manufactured products are installed on projects. This limitation is restricted solely to storage of the product and does not affect the lifetime of product after it has been installed.

Sheet – standard. Black

Item	Thickness [mm]	Width [m]	Length [m]	Content [metric]
ASD-240-06	6	1	1	8 m ²
ASD-240-10	10	1	1	5 m ²
ASD-240-15	15	1	1	3 m ²
ASD-240-20	20	1	1	2 m ²
ASD-240-25	25	1	1	2 m ²

Other information

Remarks Primary content available as sheet(s) packed in carton.

Sheet – self-adhesive. Black

Item	Thickness [mm]	Width [m]	Length [m]	Content [metric]
ASD-240-06/A	6	1	1	8 m ²
ASD-240-10/A	10	1	1	5 m ²
ASD-240-15/A	15	1	1	3 m ²
ASD-240-20/A	20	1	1	2 m ²
ASD-240-25/A	25	1	1	2 m ²

Other information

Remarks Primary content available as sheet(s) packed in carton.

Adhesives and Cleaners

Item	Description	Content [quantity]
ADH520/2,5E	2.5 litre tins of ArmaFlex 520 adhesive packed in a carton.	8 tin
ADH520/1,0E	1.0 litre tins of ArmaFlex 520 adhesive packed in a carton.	12 tin
ADH520/0,5E	0.5 litre tins of ArmaFlex 520 adhesive packed in a carton.	12 tin
ADH520/0,25E	0.25 litre tins of ArmaFlex 520 adhesive with built-in brush, packed in a carton.	24 tin
ADH-HT625/1,0	ArmaFlex HT625 one-component adhesive. Available as 1.0 litre cans.	12 tin
ADH-HT625/0,5	ArmaFlex HT625 one-component adhesive. Available as 0.5 litre cans.	12 tin
ADH-HT625/0,25	ArmaFlex HT625 one-component adhesive. Available as 0.25 litre cans (with brush).	40 tin

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

Trademarks followed by © or ™ are trademarks of the Armacell Group. © Armacell, 2024. All rights reserved.

ArmaSound | ArmaSound RD240 (EMEA) | Brochure | 042024 | en-GB

ABOUT ARMACELL

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.



For more information, please visit:
www.armacell.com