





HIGH-PERFORMANCE
ACOUSTIC ABSORBER FOR A
QUIETER ENVIRONMENT

ArmaComfort H

Effective air-borne sound absorption
across a broad frequency range

- // Fibre-free, open-cell material with complex pore geometry
- // Flexible and light weight
- // Additional barrier performance, vibration damping and de-coupling (isolation) properties

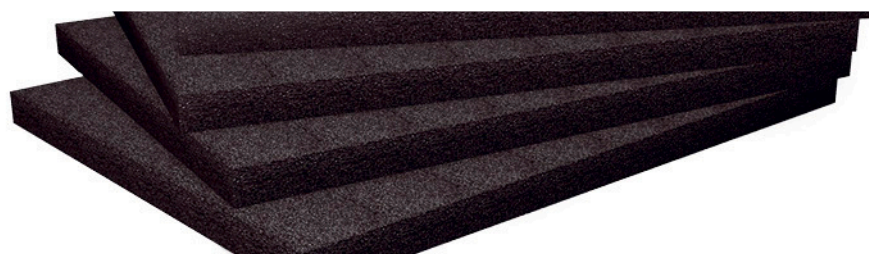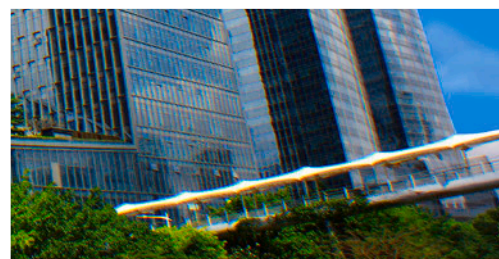

 **armacell**[®]
ArmaComfort[®]

TECHNICAL DATA - ARMACOMFORT H

Brief description	ArmaComfort is a unique open-cell sound absorber that offers additional barrier (transmission loss) performance and both vibration damping and de-coupling (isolation) properties.
Material type	Open-cell elastomeric foam based on synthetic rubber
Product colour range	Black
Special features	Excellent sound absorption performance.
Applications	Delivering optimal performance at lower thickness than conventional materials, ArmaComfort is the trusted acoustic absorption material for HVAC applications (such as the fan-coil units, duct and cabinet linings and chiller systems), heavy industrial and automotive purposes (such as engine component lining and under-bonnet insulation), enclosures as well as in oil and gas facilities.


Property	Value / Assessment							Standard / Test method
Temperature range								
Service temperature ¹	Min. °C						Max. °C	
	-20						85	
Thermal conductivity								
Declared thermal conductivity ²	θm						23 °C	GB/T 10294, ISO 8302
	λd ≤ [W/(m·K)]						0.070	
Flammability								
Flammability of plastic materials	V-0 rating							UL 94
Physical attributes								
Density	≥ 220 kg/m ³							ISO 845
Acoustic performance								
Noise reduction coefficient	Thickness (mm)	6	10	15	20	25	50	ASTM C423, ISO 354
	NRC	0.20	0.35	0.45	0.60	0.70	0.95	
Octave band sound absorption coefficient, α	Thickness	6mm	10mm	15mm	20mm	25mm	50mm	ISO 354
	125 Hz	0.02	0.03	0.05	0.05	0.05	0.20	
	250 Hz	0.02	0.05	0.09	0.13	0.21	0.68	
	500 Hz	0.07	0.11	0.23	0.38	0.60	1.02	
	1000 Hz	0.19	0.40	0.69	0.90	1.00	0.99	
	2000 Hz	0.47	0.78	0.87	0.97	0.95	1.03	
	4000 Hz	0.94	0.95	0.87	0.90	0.97	1.04	

Property

Value / Assessment

Standard / Test method

Absorption coefficient graph

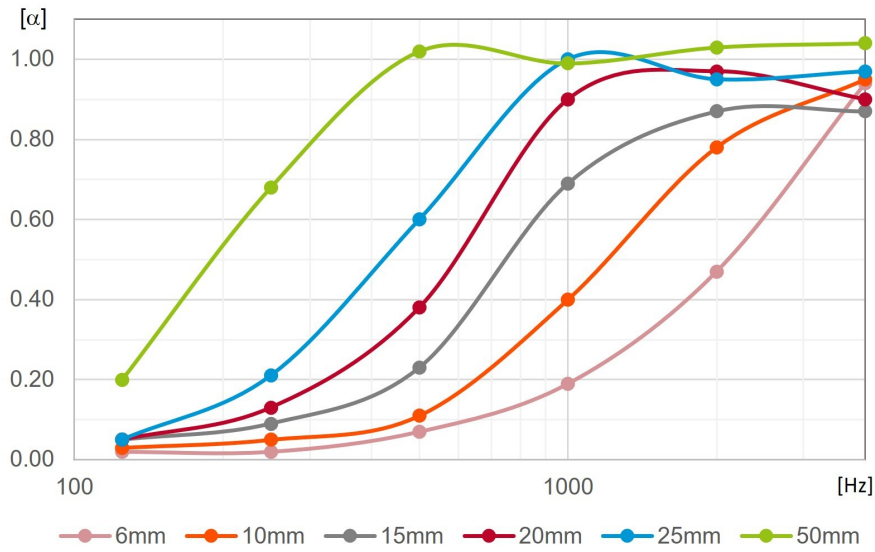

Weather and UV resistance

Outdoor use For outdoor application, the outer layer of the material must be protected within 3 days with an adequate covering like ArmaClad Arma-Chek Silver 350 or metal jacketing. For further information, please contact Technical Services.

Health and environment

Health aspects Free of fibre and formaldehyde.

Environmental Product Declaration (EPD) Type III EPD: Declaration number 4789125188.101.1, UL Environment.

ISO 14025

Other technical features

Adhesion and sealing ArmaFlex Adhesive 520 shall be used for reliable adhesion of joints and seams.

Storage Material shall be stored indoors, in clean and dry conditions, away from direct sunlight.

¹For temperatures beyond the identified temperature range, please contact Armacell's Sales team for more information.

²For reference only.


Width: 1.0m, Length: 1.0m

Item	Thickness [mm]	Width [m]	Length [m]	Content [metric]
AS06100SHD	6	1	1	8 m ²
AS10100SHD	10	1	1	5 m ²
AS15100SHD	15	1	1	3 m ²
AS20100SHD	20	1	1	2 m ²
AS25100SHD	25	1	1	2 m ²
AS50100SHD	50	1	1	1 m ²

OUR CUSTOMERS
EXPECT THE BEST.
WE WORK HARD TO
GO BEYOND THAT
AND EXCEED THEIR
EXPECTATIONS.

Our extensive product portfolio has been designed and developed to meet the specific requirements of our customers and their end-users. Discover how Armacell is making a difference around the world with our products in the following pages.

To offer our customers the best service, we hold stocks of our most popular products. **Lead times and form of delivery may vary per product and per country, and may be affected during peak season and holidays.** We aim to create open lines of communication with our customers, so please contact Customer Services who can answer questions about our service commitment to you.

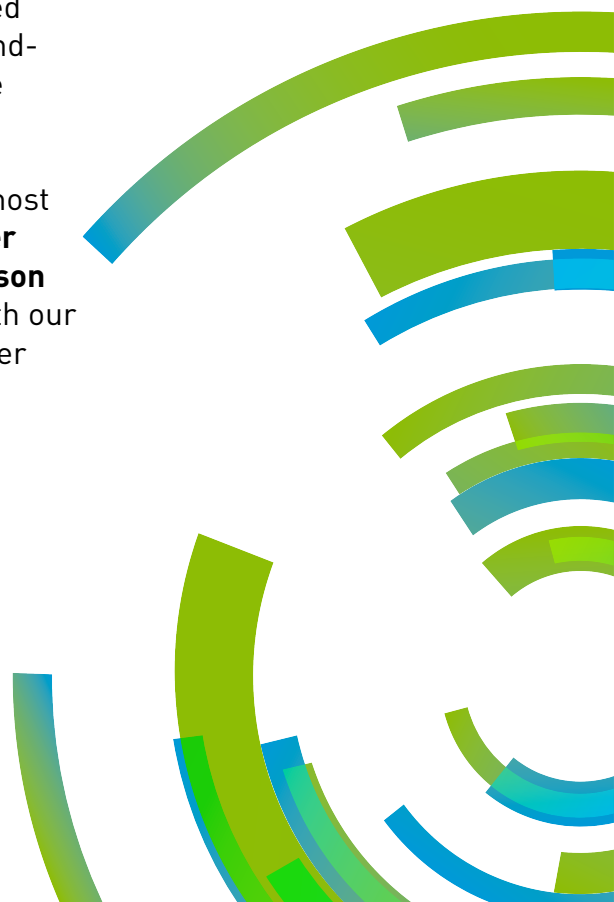

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

Trademarks followed by © or ™ are trademarks of the Armacell Group. © Armacell, 2024. All rights reserved.

ArmaComfort | ArmaComfort H | Brochure | 062024 | en-SG

ABOUT ARMACELL

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.



For more information, please visit:
www.armacell.com