





INSTALL IT. TRUST IT.

AF/ArmaFlex Evo

Discover the new generation in elastomeric insulation. AF/ArmaFlex Evo. The safest AF/ArmaFlex ever.

- // Fire Safety – B/B(L)-s2,d0
- // Antimicrobial Protection – Microban
- // Engineered Wall Thicknesses – Maximum Safety
- // System reliability – One-Stop Solution
- // Extended warranty – 10 Years*
- // Brand new – ArmaFlex 525 Adhesive

www.armacell.eu

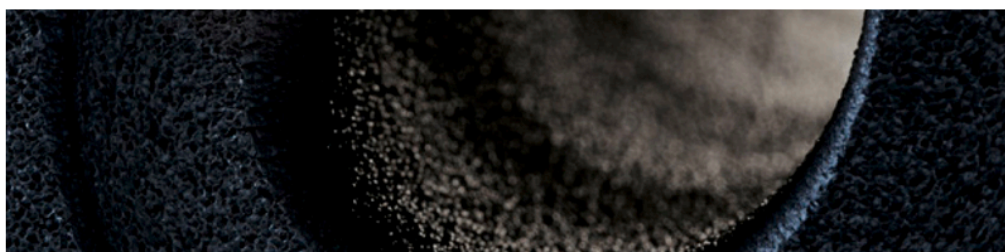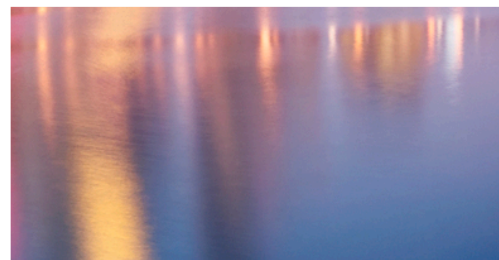

 **armacell**[®]
ArmaFlex[®]

TECHNICAL DATA - AF/ARMAFLEX EVO

Brief description	Flexible elastomeric foam with improved fire-retardant properties, low smoke generation, closed-cell insulation material structure and built-in Microban antimicrobial protection. For use in HVAC, refrigeration and process equipment application.
Material type	Elastomeric foam based on synthetic rubber. Factory-made flexible elastomeric foam (FEF), according to EN 14304.
Additional material information	Self-adhesive coating: pressure-sensitive adhesive coating on modified acrylate basis with mesh structure, covered with polyethylene foil. Traces of silicon can be found on the protection paper/foil used to protect self-adhesive closures.
Product colour range	Black
Special features	Increasing insulation wall thicknesses for tubes ensures that the surface temperature is maintained as the pipe diameter is increased.
Applications	Insulation/protection for pipes, air ducts, vessels (including elbows, fittings, flanges, etc.) of air-conditioning/refrigeration and process equipment to prevent condensation and save energy.
Installation	Certified and compatible adhesive for a long-term performing system is ArmaFlex 525.

Property	Value / Assessment		Standard / Test method
Temperature range			
Service temperature	Min. °C ¹	Max. °C	EN 14706, EN 14707, EN 14304
	-50	110	
	Remarks	+85 °C if sheet or tape is glued to the object with its whole surface +85 °C for tapes	
Thermal conductivity			
Declared thermal conductivity	Øm	0 °C	EN ISO 13787, EN ISO 8497
	$\lambda d \leq [W/(m \cdot K)]$	0.033	
	Range	Tubes (AF-EVO-1 - AF-EVO-4)	
	Formula	$\lambda d = [33 + 0,1 \cdot \varnothing m + 0,0008 \cdot \varnothing m^2]/1000$	
Declared thermal conductivity	Øm	0 °C	EN ISO 13787, EN 12667, EN ISO 8497
	$\lambda d \leq [W/(m \cdot K)]$	0.036	
	Range	Tubes (AF-EVO-5 - AF-EVO-6) as well as sheets and tapes (3 - 32 mm)	
	Formula	$\lambda d = [36 + 0,1 \cdot \varnothing m + 0,0008 \cdot \varnothing m^2]/1000$	
Declared thermal conductivity	Øm	0 °C	EN ISO 13787, EN 12667
	$\lambda d \leq [W/(m \cdot K)]$	0.037	
	Range	Sheets (> 32 mm - 50 mm)	
	Formula	$\lambda d = [37 + 0,1 \cdot \varnothing m + 0,0008 \cdot \varnothing m^2]/1000$	
Fire Performance and Approvals			
Reaction to fire	Tubes: B(L)-s2, d0 Sheets, Tapes: B-s2,d0 Tubes/sheets with ArmaFix AF: B(L)-s2,d0		EN 13501-1, EN ISO 11925-2, EN 13823
Surface flammability ²	low-flammable - 2010 FTP-Code (MED 96/98/EC, Module D)		IMO 2010 FTP Code, Part 5
Passive fire protection			
Fire resistance of elements of construction	EI 30 - EI 90		EN 13501-2, EN 1366-3
UL standards			
UL 94 5VA	Pass (tubes and sheets \geq 3.0 mm)		UL 94, IEC 60695-11-10, UL 746B, UL 746 A

Property	Value / Assessment	Standard / Test method
Fire performance		
Practical fire behaviour	Self-extinguishing, does not drip, does not spread flames, low smoke development	
Physical attributes		
Dimensions and tolerances	in accordance with EN 14304, table 1	EN 822, EN 823, EN 13467
Weather and UV resistance		
UV resistance ³	Protection against UV-radiation is necessary (see Technical Bulletin no. 142).	
Health and environment		
Antimicrobial behaviour	In-built Microban active antimicrobial protection: No fungal growth observed	EN ISO 846, VDI 6022
Environmental Product Declaration (EPD)	Type III Environmental Product Declaration (EPD): Declaration number "EPD-ARM-20220038-IBB1-EN", Institut Bauen und Umwelt e.V. (IBU)	ISO 14025, EN 15804+A2
Other technical features		
Adhesion and sealing	ArmaFlex 525 is the certified adhesive for this product. However, ArmaFlex 520 adhesive can potentially be used for tubes.	
Shelf life	Self-adhesive tapes, self-adhesive sheets, self-adhesive tubes: 1 year	
Storage	Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).	

¹For use in temperatures beyond the maximum and minimum service temperature range indicated in the technical data table, please contact our Customer Service Centre.

²According to IMO 2010 FTP Code annex 2, clause 2.2 a fire technical test for smoke density and toxicity is not necessary.

³If ArmaFlex is used outdoors or in applications under UV radiation, it should be protected with a covering such as Arma-Chek within 3 days of installation.

Tube – standard

AF-1

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
6	7	8.5	AF-EVO-1-006	7	7612207480597	360 m
8	9	10.5	AF-EVO-1-008	7	7612207480610	310 m
10	11	12.5	AF-EVO-1-010	7.5	7612207480634	300 m
12	13	14.5	AF-EVO-1-012	7.5	7612207480658	234 m
15	16	17.5	AF-EVO-1-015	8	7612207480566	192 m
18	19	20.5	AF-EVO-1-018	8	7612207480511	140 m
22	23	24.5	AF-EVO-1-022	8.5	7612207480542	132 m
25	26	27.5	AF-EVO-1-025	8.5	7612207480856	108 m
28	29	30.5	AF-EVO-1-028	8.5	7612207480863	100 m
30	31	33	AF-EVO-1-030	9	7612207480726	96 m
32	33	35	AF-EVO-1-032	9	7612207495003	84 m
35	36	38	AF-EVO-1-035	9	7612207480740	76 m
38	39	41	AF-EVO-1-038	9	7612207480979	70 m
42	43.5	45.5	AF-EVO-1-042	9	7612207480986	60 m
45	46	47.5	AF-EVO-1-045	9	7612207495010	56 m
48	49.5	51.5	AF-EVO-1-048	9	7612207481006	50 m
54	55	57	AF-EVO-1-054	9	7612207481044	48 m
57	58	60	AF-EVO-1-057	9	7612207495027	40 lft
60	61.5	63.5	AF-EVO-1-060	9	7612207481075	36 m
64	65	67.5	AF-EVO-1-064	9.5	7612207481099	32 m
70	71	73.5	AF-EVO-1-070	9.5	7612207480702	32 m
76	77	79.5	AF-EVO-1-076	9.5	7612207480719	28 m
80	81	84	AF-EVO-1-080	9.5	7612207480764	24 m
89	90.5	93	AF-EVO-1-089	9.5	7612207480801	22 m
102	105	108	AF-EVO-1-102	9.5	7612207480825	16 m
108	109.5	113	AF-EVO-1-108	9.5	7612207480832	16 m
110	112	116	AF-EVO-1-110	9.5	7612207480870	16 m
114	116	120	AF-EVO-1-114	9.5	7612207480887	16 m
125	127	131	AF-EVO-1-125	9.5	7612207494990	12 m
140	142	146	AF-EVO-1-140	10	7612207480894	12 m
160	162	166	AF-EVO-1-160	10	7612207495034	8 m

Tube – standard

AF-2

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
6	7	8.5	AF-EVO-2-006	9.5	7612207480900	288 m
8	9	10.5	AF-EVO-2-008	10	7612207480924	240 m
10	11	12.5	AF-EVO-2-010	11	7612207480948	170 m
12	13	14.5	AF-EVO-2-012	11	7612207481013	168 m
15	16	17.5	AF-EVO-2-015	11.5	7612207480788	130 m

Tube – standard

AF-2

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
18	19	20.5	AF-EVO-2-018	11.5	7612207481488	120 m
22	23	24.5	AF-EVO-2-022	12	7612207481532	100 m
25	26	27.5	AF-EVO-2-025	12.5	7612207481433	88 lft
28	29	30.5	AF-EVO-2-028	12.5	7612207481464	84 m
30	31	33	AF-EVO-2-030	12.5	7612207481365	72 m
32	33	35	AF-EVO-2-032	13	7612207495041	64 m
35	36	38	AF-EVO-2-035	13	7612207481389	62 m
40	41	42.5	AF-EVO-2-040	13.5	7612207481426	44 m
42	42.5	45.5	AF-EVO-2-042	13.5	7612207481440	48 m
48	49.5	51.5	AF-EVO-2-048	13.5	7612207481471	44 m
50	51	52.5	AF-EVO-2-050	13.5	7612207495058	32 m
54	55	57	AF-EVO-2-054	13.5	7612207481525	36 m
57	58	60	AF-EVO-2-057	14	7612207495065	34 m
60	61.5	63.5	AF-EVO-2-060	14	7612207482324	32 m
64	65	67.5	AF-EVO-2-064	14	7612207495294	30 m
64	65	67.5	AF-EVO-2-064	14	7612207482454	28 m
70	71	73.5	AF-EVO-2-070	14	7612207481839	28 m
76	77	79.5	AF-EVO-2-076	14	7612207481976	28 m
80	81	84	AF-EVO-2-080	14.5	7612207481990	24 m
89	90.5	93	AF-EVO-2-089	14.5	7612207482072	22 m
102	105	108	AF-EVO-2-102	14.5	7612207482096	18 m
108	109.5	113	AF-EVO-2-108	14.5	7612207482164	18 lft
110	112	116	AF-EVO-2-110	15	7612207495072	16 m
114	116	120	AF-EVO-2-114	15	7612207482171	16 m
125	127	131	AF-EVO-2-125	15	7612207482232	12 m
133	135	139	AF-EVO-2-133	15.5	7612207482249	12 m
140	142	146	AF-EVO-2-140	15.5	7612207482256	8 m
160	162	166	AF-EVO-2-160	16	7612207482331	8 m

Tube – standard

AF-3

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
10	11	12.5	AF-EVO-3-010	12.5	7612207482348	156 m
12	13	14.5	AF-EVO-3-012	13	7612207482355	144 m
15	16	17.5	AF-EVO-3-015	14	7612207482362	108 m
18	19	20.5	AF-EVO-3-018	14	7612207482461	96 m
22	23	24.5	AF-EVO-3-022	14.5	7612207482485	84 m
28	29	30.5	AF-EVO-3-028	15.5	7612207482508	64 m
35	36	38	AF-EVO-3-035	16	7612207482546	46 m
42	43.5	45.5	AF-EVO-3-042	16.5	7612207482560	40 m

Tube – standard

AF-3

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
48	49.5	51.5	AF-EVO-3-048	16.5	7612207482621	32 m
54	55	57	AF-EVO-3-054	17	7612207482676	28 m
60	61.5	63.5	AF-EVO-3-060	17	7612207482706	24 m
64	65	67.5	AF-EVO-3-064	17	7612207495089	20 m
70	71	73.5	AF-EVO-3-070	17.5	7612207495096	18 m
76	77	79.5	AF-EVO-3-076	17.5	7612207482720	16 m
89	90.5	93	AF-EVO-3-089	18	7612207482744	16 m
108	109.5	113	AF-EVO-3-108	18	7612207482768	12 m
110	112	116	AF-EVO-3-110	18	7612207495102	12 m
114	116	120	AF-EVO-3-114	18.5	7612207482775	12 m
125	127	131	AF-EVO-3-125	18.5	7612207495119	12 m
133	135	139	AF-EVO-3-133	18.5	7612207482782	8 m
140	162	166	AF-EVO-3-140	19	7612207495126	8 m
160	162	166	AF-EVO-3-160	19	7612207482829	6 m

Tube – standard

AF-4

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
6	7	8.5	AF-EVO-4-006	15.5	7612207492897	120 m
10	11	12.5	AF-EVO-4-010	15.5	7612207482881	110 m
12	13	14.5	AF-EVO-4-012	16	7612207482898	100 m
15	16	17.5	AF-EVO-4-015	17	7612207481617	88 m
18	19	20.5	AF-EVO-4-018	17.5	7612207481631	70 m
22	23	24.5	AF-EVO-4-022	18	7612207481655	60 m
25	26	27.5	AF-EVO-4-025	18.5	7612207481730	56 m
28	29	30.5	AF-EVO-4-028	19	7612207481747	48 m
30	31	33	AF-EVO-4-030	19	7612207481761	40 m
32	33	35	AF-EVO-4-032	19.5	7612207495133	40 m
35	36	38	AF-EVO-4-035	19.5	7612207481846	36 m
40	41	42.5	AF-EVO-4-040	20.5	7612207495140	32 m
42	43.5	45.5	AF-EVO-4-042	20.5	7612207481860	32 m
45	46	47.5	AF-EVO-4-045	20.5	7612207495157	28 m
48	49.5	51.5	AF-EVO-4-048	21	7612207481884	24 m
50	51	52.5	AF-EVO-4-050	21	7612207495164	24 m
54	55	57	AF-EVO-4-054	21	7612207482010	24 m
57	58	60	AF-EVO-4-057	21.5	7612207501841	20 m
60	61.5	63.5	AF-EVO-4-060	21.5	7612207482034	20 m
64	65	67.5	AF-EVO-4-064	21.5	7612207482102	18 m
70	71	73.5	AF-EVO-4-070	22	7612207482188	16 m
76	77	79.5	AF-EVO-4-076	22	7612207482201	16 m

Tube – standard

AF-4

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
80	81	84	AF-EVO-4-080	22.5	7612207482270	16 m
89	90.5	93	AF-EVO-4-089	22.5	7612207482386	12 m
102	105	108	AF-EVO-4-102	23	7612207482409	10 m
108	109.5	113	AF-EVO-4-108	23	7612207482416	10 m
110	112	116	AF-EVO-4-110	23	7612207495171	10 m
114	116	120	AF-EVO-4-114	23.5	7612207482515	10 m
125	127	131	AF-EVO-4-125	23.5	7612207482522	8 m
133	135	139	AF-EVO-4-133	24	7612207482577	6 m
140	142	146	AF-EVO-4-140	24.5	7612207482584	6 m
160	162	166	AF-EVO-4-160	25	7612207482591	6 m
168	170	174	AF-EVO-4-168	25	7612207482607	4 m

Tube – standard

AF-5

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
18	19	20.5	AF-EVO-5-018	25	7612207482638	42 m
22	23	24.5	AF-EVO-5-022	25	7612207482645	36 m
28	29	30.5	AF-EVO-5-028	25	7612207482652	36 m
30	31	33	AF-EVO-5-030	26	7612207501865	32 m
35	36	38	AF-EVO-5-035	27	7612207482690	24 m
42	43.5	45.5	AF-EVO-5-042	27	7612207482799	22 m
48	49.5	51.5	AF-EVO-5-048	27.5	7612207482805	16 m
54	55	57	AF-EVO-5-054	28.5	7612207482812	16 m
60	61.5	63.5	AF-EVO-5-060	29	7612207482843	12 m
64	65	67.5	AF-EVO-5-064	29	7612207495188	12 m
70	71	73.5	AF-EVO-5-070	29.5	7612207494228	12 m
76	77	79.5	AF-EVO-5-076	30	7612207482850	10 m
89	90.5	93	AF-EVO-5-089	30.5	7612207482867	8 m
108	109.5	113	AF-EVO-5-108	31	7612207482928	6 m
114	116	120	AF-EVO-5-114	31.5	7612207482904	6 m
125	127	131	AF-EVO-5-125	31.5	7612207495195	6 m
140	142	146	AF-EVO-5-140	32	7612207495201	6 m
168	170	174	AF-EVO-5-168	32	7612207495218	4 m

Tube – standard

AF-6

AF-6							36 mm			
Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]	Pipe Ø [mm]	Item	EAN	Primary content [metric]
10	11	12.5	AF-EVO-6-010	32	7612207482911	40 m	114	AF-EVO-36X114	7612207518092	4 m

Tube – standard

AF-6							36 mm			
Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]	Pipe Ø [mm]	Item	EAN	Primary content [metric]
12	13	14.5	AF-EVO-6-012	32	7612207481563	36 m	140	AF-EVO-36X140	7612207517859	4 m
15	16	17.5	AF-EVO-6-015	32	7612207481570	32 m	168	AF-EVO-36X168	7612207517866	4 m
18	19	20.5	AF-EVO-6-018	32	7612207481549	32 m	-	-	-	-
22	23	24.5	AF-EVO-6-022	33.5	7612207481556	28 m	-	-	-	-
28	29	30.5	AF-EVO-6-028	35	7612207481662	24 m	-	-	-	-
35	36	38	AF-EVO-6-035	35	7612207481679	18 m	-	-	-	-
42	43.5	45.5	AF-EVO-6-042	36.5	7612207481686	16 m	-	-	-	-
48	49.5	51.5	AF-EVO-6-048	37.5	7612207481693	12 m	-	-	-	-
54	55	57	AF-EVO-6-054	38	7612207481778	12 m	-	-	-	-
57	58	60	AF-EVO-6-057	38.5	7612207495225	12 m	-	-	-	-
60	61.5	63.5	AF-EVO-6-060	39	7612207481785	10 m	-	-	-	-
64	65	67.5	AF-EVO-6-064	39.5	7612207481891	10 m	-	-	-	-
70	71	73.5	AF-EVO-6-070	40	7612207481907	8 m	-	-	-	-
76	77	79.5	AF-EVO-6-076	40.5	7612207481914	8 m	-	-	-	-
89	90.5	93	AF-EVO-6-089	41.5	7612207482133	6 m	-	-	-	-
102	105	108	AF-EVO-6-102	42.5	7612207482126	6 m	-	-	-	-
108	109.5	113	AF-EVO-6-108	42.5	7612207482218	4 m	-	-	-	-
114	116	120	AF-EVO-6-114	43	7612207482225	4 m	-	-	-	-
125	127	131	AF-EVO-6-125	44	7612207514490	4 m	-	-	-	-
133	134	139	AF-EVO-6-133	44	7612207501834	4 m	-	-	-	-
140	142	146	AF-EVO-6-140	44.5	7612207495232	4 m	-	-	-	-
160	162	166	AF-EVO-6-160	45	7612207492880	4 m	-	-	-	-
168	170	174	AF-EVO-6-168	45	7612207501858	4 m	-	-	-	-

Tube – standard

40 mm				45 mm				55 mm			
Pipe Ø [mm]	Item	EAN	Primary content [metric]	Pipe Ø [mm]	Item	EAN	Primary content [metric]	Pipe Ø [mm]	Item	EAN	Primary content [metric]
18	AF-EVO-40X018	7612207517880	16 m	42	AF-EVO-45X042	7612207517910	10 m	114	AF-EVO-55X114	7612207517927	4 m
22	AF-EVO-40X022	7612207517903	16 m	54	AF-EVO-45X054	7612207517989	8 m	140	AF-EVO-55X140	7612207518115	2 m
25	AF-EVO-40X025	7612207517996	16 m	64	AF-EVO-45X064	7612207518009	8 m	168	AF-EVO-55X168	7612207517934	2 m
28	AF-EVO-40X028	7612207517941	16 m	76	AF-EVO-45X076	7612207518047	6 m	-	-	-	-
35	AF-EVO-40X035	7612207517828	16 m	89	AF-EVO-45X089	7612207518108	6 m	-	-	-	-
-	-	-	-	114	AF-EVO-45X114	7612207518016	4 m	-	-	-	-
-	-	-	-	125	AF-EVO-45X125	7612207518023	4 m	-	-	-	-
-	-	-	-	140	AF-EVO-45X140	7612207517897	4 m	-	-	-	-
-	-	-	-	-	AF-EVO-45X048	7612207518030	-	-	-	-	-

Tube – self-seal
AF-1

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
12	12	14.5	AF-EVO-1-012-A	7.5	7612207480672	234 m
15	16	17.5	AF-EVO-1-015-A	8	7612207480580	192 m
18	19	20.5	AF-EVO-1-018-A	8	7612207480535	140 m
22	23	24.5	AF-EVO-1-022-A	8.5	7612207480849	132 m
28	29	30.5	AF-EVO-1-028-A	8.5	7612207480696	100 m
30	31	33	AF-EVO-1-030-A	9	7612207480733	96 m
35	36	38	AF-EVO-1-035-A	9	7612207480962	76 m
42	43.5	45.5	AF-EVO-1-042-A	9	7612207480993	60 m
48	49.5	51.5	AF-EVO-1-048-A	9	7612207481037	50 m
54	55	57	AF-EVO-1-054-A	9	7612207495270	48 m
60	61.5	63.5	AF-EVO-1-060-A	9	7612207481082	36 m
76	77	79.5	AF-EVO-1-076-A	9.5	7612207480757	28 m
89	90.5	93.5	AF-EVO-1-089-A	9.5	7612207480818	22 m

Tube – self-seal
AF-2

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
12	12	14.5	AF-EVO-2-012-A	11	7612207480771	168 m
15	16	17.5	AF-EVO-2-015-A	11.5	7612207481051	130 m
18	19	20.5	AF-EVO-2-018-A	11.5	7612207481341	120 m
22	23	24.5	AF-EVO-2-022-A	12	7612207481402	100 m
28	29	30.5	AF-EVO-2-028-A	12.5	7612207481358	84 m

Tube – self-seal

AF-2

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
30	31	33	AF-EVO-2-030-A	12.5	7612207481372	72 m
35	36	38	AF-EVO-2-035-A	13	7612207481419	62 m
42	43.5	45.5	AF-EVO-2-042-A	13.5	7612207481457	48 m
48	49.5	51.5	AF-EVO-2-048-A	13.5	7612207481501	44 m
54	55	57	AF-EVO-2-054-A	13.5	7612207482317	36 m
60	61.5	63.5	AF-EVO-2-060-A	14	7612207482447	32 m
64	65	67.5	AF-EVO-2-064-A	14	7612207481822	30 m
70	71	73.5	AF-EVO-2-070-A	14	7612207481969	28 m
76	77	79.5	AF-EVO-2-076-A	14	7612207481983	28 m
89	90.5	93.5	AF-EVO-2-089-A	14.5	7612207482089	22 m

Tube – self-seal

AF-3

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
15	16	17.5	AF-EVO-3-015-A	13.5	7612207482379	108 m
18	19	20.5	AF-EVO-3-018-A	14	7612207482478	96 m
22	23	24.5	AF-EVO-3-022-A	14.5	7612207482492	84 m
28	29	30.5	AF-EVO-3-028-A	15.5	7612207482539	64 m
35	36	38	AF-EVO-3-035-A	16	7612207482553	46 m
42	43.5	45.5	AF-EVO-3-042-A	16.5	7612207482614	40 m
48	49.5	51.5	AF-EVO-3-048-A	16.5	7612207482669	32 m
54	55	57	AF-EVO-3-054-A	17	7612207482683	28 m
60	61.5	63.5	AF-EVO-3-060-A	17.5	7612207482713	24 m
76	77	79.5	AF-EVO-3-076-A	17.5	7612207482737	16 m
89	90.5	93.5	AF-EVO-3-089-A	17.5	7612207482751	16 m

Tube – self-seal

AF-4

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
15	16	17.5	AF-EVO-4-015-A	17	7612207481624	88 m
18	19	20.5	AF-EVO-4-018-A	17.5	7612207481648	70 m
22	23	24.5	AF-EVO-4-022-A	18	7612207481723	60 m
28	29	30.5	AF-EVO-4-028-A	19	7612207481754	48 m
35	36	38	AF-EVO-4-035-A	19.5	7612207481853	36 m
42	43.5	45.5	AF-EVO-4-042-A	20.5	7612207481877	32 m
48	49.5	51.5	AF-EVO-4-048-A	21	7612207482003	24 m
54	55	57	AF-EVO-4-054-A	21	7612207482027	24 m
60	61.5	63.5	AF-EVO-4-060-A	21.5	7612207482041	20 m
64	65	67.5	AF-EVO-4-064-A	21.5	7612207482119	18 m
70	70	73.5	AF-EVO-4-070-A	22	7612207482195	16 m

Tube – self-seal**AF-4**

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
76	77	79.5	AF-EVO-4-076-A	22	7612207482263	16 m
89	90.5	93.5	AF-EVO-4-089-A	22.5	7612207482393	12 m

Coil**AF-1**

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
6	7	8.5	AF-EVO-1-006/E	7	7612207480603	90 m
8	9	10.5	AF-EVO-1-008/E	7	7612207480627	80 m
10	11	12.5	AF-EVO-1-010/E	7.5	7612207480641	60 m
12	13	14.5	AF-EVO-1-012/E	7.5	7612207480665	50 m
15	16	17.5	AF-EVO-1-015/E	8	7612207480573	40 m
18	19	20.5	AF-EVO-1-018/E	8	7612207480528	35 m
22	23	24.5	AF-EVO-1-022/E	8.5	7612207480559	30 m
28	29	30.5	AF-EVO-1-028/E	8.5	7612207480689	28 m

Coil**AF-2**

Pipe Ø [mm]	Inner diameter (minimum) [mm]	Inner diameter (maximum) [mm]	Item	Insulation thickness [mm]	EAN	Primary content [metric]
6	7	8.5	AF-EVO-2-006/E	9.5	7612207480917	60 m
8	9	10.5	AF-EVO-2-008/E	10	7612207480931	55 m
10	11	12.5	AF-EVO-2-010/E	11	7612207480955	35 m
12	13	14.5	AF-EVO-2-012/E	11	7612207481020	32 m
15	16	17.5	AF-EVO-2-015/E	11.5	7612207480795	32 m
18	19	20.5	AF-EVO-2-018/E	11.5	7612207481495	30 m
22	23	24.5	AF-EVO-2-022/E	12	7612207481396	26 m
28	29	30.5	AF-EVO-2-028/E	12.5	7612207481518	20 m

Sheet – standard

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Primary content [metric]
AF-EVO-10MM	10	500	2	7612207482430	13 m ²
AF-EVO-13MM	13	500	2	7612207481815	9 m ²
AF-EVO-16MM	16	500	2	7612207482140	8 m ²
AF-EVO-19MM	19	500	2	7612207481327	7 m ²
AF-EVO-25MM	25	500	2	7612207481259	5 m ²
AF-EVO-32MM	32	500	2	7612207481174	4 m ²
AF-EVO-50MM	50	500	2	7612207494068	3 m ²

Sheet – self-adhesive

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Primary content [metric]
AF-EVO-10MM/A	10	500	2	7612207481587	13 m ²

Sheet - self-adhesive

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Primary content [metric]
AF-EVO-13MM/A	13	500	2	7612207481921	9 m ²
AF-EVO-19MM/A	19	500	2	7612207481334	7 m ²
AF-EVO-25MM/A	25	500	2	7612207481266	5 m ²
AF-EVO-32MM/A	32	500	2	7612207481181	4 m ²

Roll - standard

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Primary content [metric]
AF-EVO-03MM/E	3	1,000	30	7612207482836	30 m ²
AF-EVO-06MM/E	6	1,000	15	7612207482294	15 m ²
AF-EVO-10MM/E	10	1,000	10	7612207481594	10 m ²
AF-EVO-13MM/E	13	1,000	8	7612207481938	8 m ²
AF-EVO-16MM/E	16	1,000	7	7612207482157	7 m ²
AF-EVO-19MM/E	19	1,000	6	7612207480498	6 m ²
AF-EVO-25MM/E	25	1,000	4	7612207481273	4 m ²
AF-EVO-32MM/E	32	1,000	3	7612207481198	3 m ²
AF-EVO-50MM/E	50	1,000	5	7612207494051	5 m ²

Roll - standard self-adhesive

Item	Insulation thickness [mm]	Width [mm]	Length [m]	EAN	Primary content [metric]
AF-EVO-03MM/EA	3	1,000	30	7612207482874	30 m ²
AF-EVO-06MM/EA	6	1,000	15	7612207482287	15 m ²
AF-EVO-10MM/EA	10	1,000	10	7612207481709	10 m ²
AF-EVO-13MM/EA	13	1,000	8	7612207481945	8 m ²
AF-EVO-16MM/EA	16	1,000	7	7612207481303	7 m ²
AF-EVO-19MM/EA	19	1,000	6	7612207481211	6 m ²
AF-EVO-25MM/EA	25	1,000	4	7612207481280	4 m ²
AF-EVO-32MM/EA	32	1,000	3	7612207481204	3 m ²

Tape - self-adhesive

Item	Thickness [mm]	Width [mm]	Length [m]	EAN	Primary content [pieces]
AF-EVO-TAPE-MC	3	50	15	7612207481105	12 roll
AF-EVO-TAPE-MC/6	3	50	15	7612207481112	6 roll

Strips - self-adhesive

Item	Thickness [mm]	Width [mm]	Length [m]	EAN	Primary content [pieces]
AF-EVO-10MM/E-S100	10	100	10	7612207481792	10 roll
AF-EVO-10MM/E-S50	10	50	10	7612207481808	20 roll
AF-EVO-13MM/E-S100	13	100	8	7612207482058	10 roll
AF-EVO-13MM/E-S50	13	50	8	7612207482065	20 roll
AF-EVO-19MM/E-S100	19	100	6	7612207481228	10 roll
AF-EVO-19MM/E-S50	19	50	6	7612207481235	20 roll
AF-EVO-19MM/E-S75	19	75	6	7612207481242	13 roll

Adhesives and Cleaners

Item	Description	Primary content [pieces]
ADH-525/0,25	0.25 litre tins packed in a carton.	40 piece
ADH-525/0,5	0.5 litre tins packed in a carton.	12 piece
ADH-525/1,0	1.0 litre tins packed in a carton.	12 piece
ADH-525/2,5	2.5 litre tins packed in a carton.	8 piece
CLEANER/1,0	Special cleaner for use with ArmaFlex adhesives	4 piece

OUR CUSTOMERS EXPECT THE BEST. WE WORK HARD TO GO BEYOND THAT AND EXCEED THEIR EXPECTATIONS.

At Armacell we want to create a unique customer experience. We understand the challenges of today's construction industry and support you in the successful delivery of your projects. From planning to delivery, our 360° service supports you throughout the entire process.



SERVICE AND TECHNICAL INFORMATION AVAILABLE 24/7


At Armacell, we do everything we can to ensure your project runs smoothly. This is why the information about the Armacell services you benefit from is available 24/7 from Armacell.com website as well as from our planning tools (BIM, specification documents, ArmaWin, as well as our sustainable building policy)

DEDICATED LOCAL CONTACTS

We aim to create open lines of communication with our customers. From on-site trainings and webinars by our Armacell technical experts advising on project planning and safety instructions to our local dedicated sales and customer services, your local Armacell dedicated team is working in partnership with you to achieve more together.

DIGITAL INFORMATION FLOWS

From order to delivery, we also provide you with digital information flows such as EDI and other well-known data formats that are widely used in the construction sector worldwide.



OUR STANDARD LOGISTICS SERVICES INCLUDE

- // Material ordered will be shipped from our facilities within 48 hours after order confirmation
- // Full truck loads and full pallets (not mixed – 1 SKU per pallet)
- // List prices in this document are based on Ex Works
- // Container loading with standard goods
- // Customs clearance (including documentation) for standard deliveries outside EU
- // Dangerous goods process for road freight

WE GO BEYOND STANDARD SERVICES AND ALSO PROPOSE YOU ADDITIONAL SERVICES*

OPIMISED PACKAGING

- Edge protection
- Strapping
- Doubled stretching
- Reinforced cardboard with extra layer
- Additional warning tape

LABELLING

- Extra label for transport instructions

EXTRA DELIVERY SERVICES

- Just in time delivery
- Delivery with lifting platform for partial or complete load
- Express and direct shipments
- Booking a delivery time slot via your EDP system
- Forklift truck for unloading at construction site
- Air and sea freight deliveries
- Dangerous goods shipment process for air and sea freight



To mitigate cost increases and reduce waste generation, we also propose a pallet return service* by which pallets can be handed at Armacell collection points.

* Please contact your local Customer Service Centre to see which of these services apply to your country.

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

© Armacell, 2022. All rights reserved. Trademarks followed by ® or ™ are trademarks of the Armacell Group.

Microban is a registered trademark of Microban Products Company.

ArmaFlex | AF/ArmaFlex Evo | Brochure | 012023 | en-IN

ABOUT ARMACELL

As the inventors of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal, acoustic and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency, making a difference around the world every day. With more than 3200 employees and 27 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for high-tech and lightweight applications and next generation aerogel blanket technology.



For more information, please visit:
www.armacell.com